

## BX2750D SNOWBLOWER

The only difference between the BX2750C and BX2750D is that the BX2750D comes with more factory assembled parts to allow for less set up time.


## BX2750C SNOWBLOWER

For:

**BX1500, BX1800, BX2200, BX22, BX1830, BX2230, BX23, B7400HSD, B7500DT/HSD, B7410 (All models), B7510DT/HSD, B7610 (All models), B2410 (All models), BX1850 (All models), BX2350 (All models), BX24, BX25, B2320, B2620, B2920**

### FEATURES:

Large 50" cutting width  
 Female quick hitch  
 Half PTO driveline  
 Adjustable skid shoes  
 Replaceable cutting edge  
 Manual, hydraulic or Electric Chute Rotation  
 Manual or Electric Chute Deflector

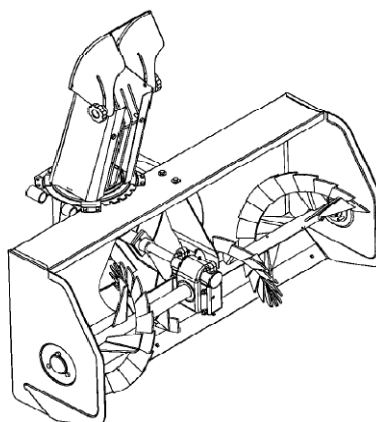

SPECIFICATIONS		
Overall length	in (mm)	113.0 (2870)
Overall width	in (mm)	50.2 (1275)
Overall height	in (mm)	37.0 (940) w/chute
Cutting width	in (mm)	48.75 (1238)
Cutting height	in (mm)	19.1 (486)
Reach from centerline of front axle to scraper blade	in (mm)	37.0 (940)
Reach from centerline of front axle to auger shaft	in (mm)	39.0 (991)
Impeller diameter	in (mm)	16.0 (406)
Impeller housing width	in (mm)	5.5 (140)
Impeller width	in (mm)	5.0 (127)
Auger diameter	in (mm)	12.88 (327)
Auger height	in (mm)	14.0 (356)
Auger clearance from ground	in (mm)	1.38 (35)
Flighting pitch	in (mm)	15.0 (381)
Lift height above ground level	in (mm)	7.88 (200)
Cutting depth below ground level	in (mm)	10.25 (260)
Maximum angle of approach	deg.	15°
Package weight	lbs (kg)	282 (128)

SPECIFICATIONS - DIMENSIONAL & HYDRAULIC		
Number of impellers		3
Impeller speed @ PTO rpm		920 rpm @ 2683 PTO rpm
Auger speed @ PTO rpm		286 rpm @ 2683 PTO rpm
Chute rotation	deg.	225
Discharge chute diameter	in (mm)	6.0 (152)
Capacity ton/hour (estimated)		215
Hydraulic system (tractor or external)		Tractor
Implement weight (w/Female hitch and chute)	lbs (ka)	210 (95)