

GENERAL SPECIFICATIONS

MODELS	E48-200	E54-200	E60-220	E66-220	E72-240	E78-240	E86-260	E94-260	*E80-260INV
Recommended horsepower (HP PRO).	16@25	16@25	18@40	25@40	25@40	35@50	40@75	40@75	40 @ 75
Cutting width	48"	54"	60"	66"	72"	78"	86"	94"	80"
Cutting height	26"	26"	27 1/2"	27 1/2"	27 1/2"	27 1/2"	33 1/2"	33 1/2"	33 1/2"
Fan RPM	540	540	540	540	540	540	540	540	540
Fan diameter	20"	20"	22"	22"	24"	24"	26"	26"	26"
Fan shaft diameter	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 9/16"	1 9/16"	1 9/16"	1 9/16"
Fan width	7"	7"	8"	8"	8 1/2"	8 1/2"	11"	11"	11"
Fan height (ground to center)	13 1/2"	13 1/2"	14 1/2"	14 1/2"	15 1/2"	15 1/2"	17"	17"	17"
Balanced fan	Std	Std	Std	Std	Std	Std	Std	Std	Std
Auger diameter	17"	17"	17"	17"	17"	17"	20"	20"	20"
Balanced auger	Std	Std	Std	Std	Std	Std	Std	Std	Std
Chute rotation on polyethylene	Manual	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	-
	Hydraulic motor	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Std
	Hydraulic cylinder	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	-
	Cylinder size	2" X 4"	2" X 4"	2" X 4"	2" X 4"	2" X 4"	2" X 4"	2" X 4"	2" X 4"
Cylinder length (total)	14 1/4"	14 1/4"	14 1/4"	14 1/4"	14 1/4"	14 1/4"	14 1/4"	14 1/4"	-
Chute 1 or 2 deflectors	1	1	1	1	1	1	1	1	2
Manual deflector	Std	Std	Std	Std	Std	Std	Std	Std	Std
Hydraulic deflector (2" x 4")	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Reversible carbon steel blade	Std	Std	Std	Std	Std	Std	Std	Std	Std
Adjustable skid shoes	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Storage Foot	Std	Std	Std	Std	Std	Std	Std	Std	Std
P.T.O Shaft	2	2	2	4	4	4	6	6	6
P.T.O. chain	50	50	60	60	60	60	60	60	60
Number of safety bolts	2	2	2	2	2	2	2	2	2
Hitch category	1	1	1	1	1	1	2	2	2
Approximative weight (lbs)	420	455	506	525	570	690	925	952	980

* INV= Pull Type Snowblower

The specifications listed above are subject to change without notice. Weight ratings do not include any accessory.

SNOWBLOWER WARRANTY

Every snowblower produced by Normand Co. Ltd is guaranteed against manufacturing and raw material defects (excluding the P.T.O. shaft, gearbox, hydraulic motor and hydraulic cylinder which are covered by the OEM warranty) for a full year from the date of purchase, provided that the snowblower has not been modified or abused in any way. This warranty does not cover accidents or breaks caused by objects other than snow (metal bits, concrete, wood, asphalt, tires, etc.). We will replace or repair any defective part at no cost if they are returned F.O.B. at our plant in Saint-Pascal-de-Kamouraska, Quebec. Our obligations are limited to the replacement and/or repair of the defective part.

NORMAND®
Co. Ltd

Normand Co. Ltd

340, Taché Street
Saint-Pascal (Quebec)
Canada G0L 3Y0


Phone: (418) 492-2712
1-888-666-7626
1-888-6NORMAN

Fax: (418) 492-9363

E-mail: normand@cienormand.com
Web site: www.cienormand.com



DEALER

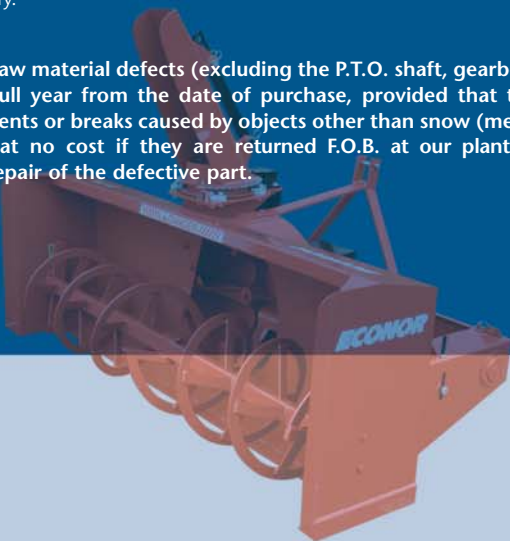

© Normand™ Co.Ltd 2010 All Rights Reserved

ECONOR®

SNOWBLOWERS

by **NORMAND**®



Quality - Sturdiness - Reliability

ECONOR® SNOWBLOWERS

Sturdy construction based on Normand commercial-grade snowblowers

Balanced auger and fan

E78-240

Meticulous construction and full-length weld

Standard carbon steel reversible blade



Adjustable skid shoes (optional)



Storage foot



Chute rotation on polyethylene UHMW

E86-260/E94-260

Quality paint with epoxy primer

Gap rod for deflector adjustment (standard)



Safety bolt on driving shaft




**E66-220/
E72-220**

**E48-200/E54-200/
E60-200**

(A) Sturdy, factory-balanced auger and fan.

(B) Carbon steel reversible blade.

(C) Discharge corrector allowing increased snow flow.

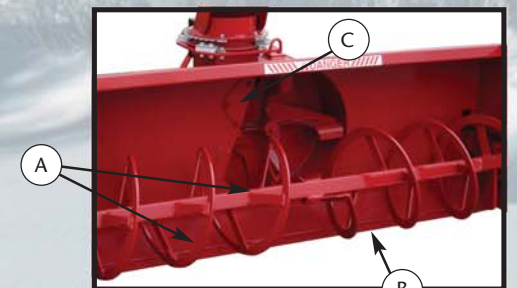

Chute rotation with steel wire (pulley type) and cylinder (optional) on E86-260 and E94-260



Manual chute rotation and hydraulic deflector (optional)



Chute rotation with steel wire (cradle type) and cylinder (optional) E48-200 to E78-240



Hydraulically-powered chute rotation (optional)

